

HONEYWELL
FIVE-CHANNEL REMOTE THERMO-HYGROMETER
For Professional Weather Station TE923W

TS34C
USER MANUAL

Table of Contents

Introduction	3
Standard Package Contents	3
Installation	3
Before you begin	3
Features	4
Troubleshooting	5
Precautions	6
Specifications	6
FCC STATEMENT	7
DECLARATION OF CONFORMITY	7
STANDARD WARRANTY INFORMATION	Error!

Bookmark not defined.

Introduction

Thank you for selecting the Five Channel Remote Thermo-hygrometer. This product measures an air temperature and relative humidity and can be used with the Honeywell Professional Weather Station TE923W.

In this package you will find:

One Five-Channel Remote Thermo-hygrometer (transmitter) (TS34C)

One User Manual

Standard Package Contents

Picture	Components
	Thermo Hygrometer Sensor

Installation

All data measured by this remote sensor is transmitted to the main unit wirelessly, with the operating range up to 328 feet (100 meters) in the open area.

Remote thermo-hygrometers (temperature & humidity sensors) can be placed indoors or outdoors, depending on the area where the temperature and humidity are intended to be measured. If you intend measuring outdoor temperature and humidity, place the remote sensor outdoors.

Note: It is critical to power up and test communication between the remote sensor and the main unit **BEFORE** permanently mounting them outside.

Before you begin

- We recommend using alkaline batteries for the remote thermo-hygrometer when temperatures are above 32°F (0°C) and lithium batteries when temperatures are below 32°F (0°C).
- Avoid using rechargeable batteries. (Rechargeable batteries cannot maintain correct power requirements).
- Insert batteries before first use, matching the polarity in the battery compartment
- Remove protective plastic screen from LCD display (if any).
- During an initial setup, place the main unit close to the remote sensor.
- After reception is established (the remote readings will appear on the main unit's display), position the remote sensor and the main unit within the effective


transmission range of up to 328 feet (100 meters). Ideally they should be placed within the line of sight of the main unit.

- Transmission range may be affected by trees, metal structures and electronic appliances.
- The effective operating range may be influenced by the surrounding building materials and how the receiver (main unit) and transmitters (weather sensors) are positioned.
- Place the remote thermo-hygrometer so that it faces the main unit (receiver), minimizing obstructions such as doors, walls and furniture.

Note: When the temperature falls below freezing, the batteries in the outdoor remote thermo-hygrometers may have reduced voltage supply and a shorter effective range. We recommend using lithium batteries at temperatures of 32°F (0°C) and below.

Features

- LCD display of measured temperature and humidity
- Five (5) transmission channels selection
- Case can be wall mounted using built-in hanger

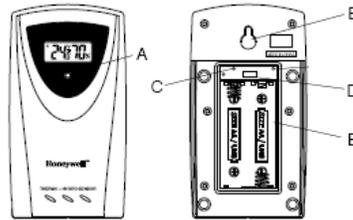

A. LED INDICATOR

- Flashes once when the remote sensor transmits a reading to the main unit.
- Flashes twice when battery power is low.

B. BATTERY COMPARTMENT

Holds two AA-size batteries

C. RESET

Resets all readings

D. CHANNEL SWITCH

Selects the desired channel from 1 to 5

E. WALL-MOUNT RECESSED OPENING

Keeps the remote sensor on the wall

Note: Install the batteries and select the channel before mounting the sensor.

Battery installation

- Remove the screws from the battery compartment with a small Phillips screwdriver.
- Set the channel 1 through 5. The switch is located in the battery compartment. Channel 1 is typically selected if only one remote thermo-hygrometer is being used.
- Install 2 “AA” size alkaline batteries (not included) matching the polarities shown in the battery compartment.
- Replace the battery compartment door and secure the screws.
- Secure the remote thermo-hygrometer in the desired location.

Mounting

- The remote thermo-hygrometer can be placed on the flat surface or mounted on the wall in vertical position
- Use the wall mount hardware and screws provided when mounting the remote thermo-hygrometer on the wall

Placement tips:

- The remote thermo-hygrometer should be placed in the area with a free air circulation and sheltered from the direct sunlight and an extreme weather conditions.
- Ideally, place the remote thermo-hygrometer above the natural surfaces (such as a grassy lawn).
- Avoid placing the remote thermo-hygrometer near sources of heat such as chimneys and heating elements.
- Avoid any areas collecting and radiating a heat from the sun, such as metal, brick or concrete structures, paving, patios and decks.
- The international standard for the valid air temperature measurements is 4 feet (1.25meters) above the ground.

Note: To display the readings from the remote thermo-hygrometer you must own the main display unit of the Honeywell Professional Weather Station TE923W, model number TE923WD. Additionally it will work with all other Honeywell weather station models.

Troubleshooting

Q: “The remote sensor display shows dashes “---”

A: Press **RESET** opening with a paper clip or similar tool.

If this does not work, check the batteries and replace them.

Q: “Main unit display in temperature and humidity portion shows dashes “---”

A: The display will show “- -” when the wireless connection with the remote thermo-hygrometer is lost for 15 minutes

Check or replace the batteries in remote sensor. Then press and hold **DOWN** button on the main unit to enforce a search for the remote signals.

If this does not work, check the wireless transmission path from the remote thermo-hygrometer to the main unit and change their locations if necessary.

The following may be the cause of reception problems:

- The remote thermo-hygrometer and a main unit are too far from each other.
- The signal shielding materials, such as metal surfaces, concrete walls or dense vegetation, are in the path of transmission.
- There is interference from the wireless devices (such as cordless phones, radio headsets and baby listening devices) and electronic appliances.

Precautions

This product is engineered to give you years of satisfactory service if handled carefully.

Here are a few precautions:

- Do not immerse the units in water.
- Do not clean the units with abrasive or corrosive materials. They may scratch the plastic parts and corrode the electronic circuits.
- Do not subject the product to excessive force, shock, dust, temperature, or humidity, which may result in malfunctions, shorter lifespan, damaged batteries, and damaged parts.
- Do not tamper with the product's internal components. Doing so will invalidate the warranty and may cause damage. The product contains no user-serviceable parts.
- Use only fresh batteries. Do not mix new and old batteries.
- Read the user's manual thoroughly before operating the product.

Specifications

Radio Frequency: 433 MHz

RF Reception range: 328 feet (100 m)

Temperature

Range: -40°F to 176°F (-40°C to 80°C)

Resolution: 0.2°F (0.1°C)

Accuracy: 2°F (1°C)

Transmitting Interval: around 47 seconds

Humidity

Operating Range: 0% to 99%

Resolution: 1%

Accuracy: 5%

Sampling Interval: 10 seconds

Transmitting Interval: around 47 seconds

Power: 2 x UM-3 or AA 1.5V battery

Battery life (alkaline): over 12 months

Weight (without batteries): 2.29oz (65g)

Dimensions: 2.37(L) x 4(H) x 1(D) inches / 60(L) x 101(H) x 25(D) mm

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modification to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment had been tested and found to comply with the limits for a Class B Digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment, installed and used in accordance with the instructions, may cause harmful interference to radio communications.

There is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to improve or correct turning the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

DECLARATION OF CONFORMITY

We

Name: Meade Instruments Corp.

Address: 27 Hubble, Irvine, CA 92618

Telephone No.: 1-949-451-1450

declare that the product

Product No.: TS34C

Product Name: Five-channel Remote Thermo-Hygrometer

Manufacturer: Hideki Electronics Ltd.

Address: Unit 2304-06, 23/F Riley House, 88 Lei Muk Road, Kwai Chung, New Territories, Hong Kong

is in conformity with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference received, including interference that may cause undesired operation.

The information above is not to be used as a contact for support or sales. Please call our customer service hotline (refer to the Standard Warranty Information) for all injuries instead.

STANDARD WARRANTY INFORMATION

This product is warranted from manufacturing defects for one year from date of retail purchase. It does not cover damages or wear resulting from accident, misuse, abuse, commercial use, or unauthorized adjustment and repair.

Should you require assistance with this product and its operation, please contact our Customer Service 1(800) 626 3233.

Please direct all returns to the place of the original purchase. Should this not be possible, contact Meade Customer Service Hotline for assistance and to obtain a Return Goods Authorization (RGA). Returns without a return authorization will be refused. Please retain your original receipt as you may be asked to provide a copy for proof of purchase. Meade Instruments Corp. reserves the right to repair or replace the product at our option. Copyright (2010) Meade Instruments Corp. All Rights Reserved. The Honeywell Trademark is used under license from Honeywell International Inc.

Honeywell International Inc. makes no representations or warranties with respect to this product.

All user manual contents and information are subject to change.